




China abec 7 Bearing Supplier

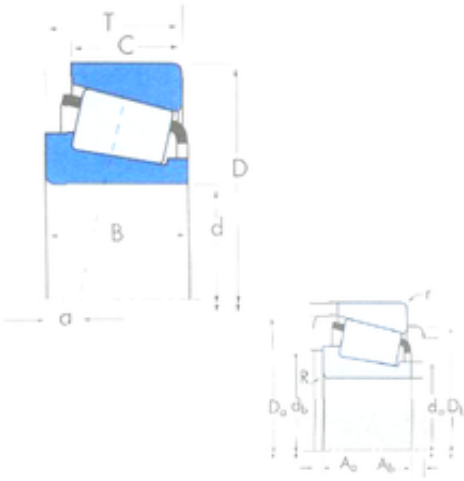

Timken Inchi Taper Roller Bearing
 Lm29749/Lm29710 U399/U360L Lm300849/11
 18347 Lm501349/Lm501310 Lm102949/Lm102910

Bearing No. Lm29749/Lm29710

| | |
|-------------------------------|-----------------------|
| Size | 38.1x65.088x18.034 mm |
| Bore Diameter | 38,1 mm |
| Outer Diameter | 65,088 mm |
| Width | 18,034 mm |
| d | 38,1 mm |
| D | 65,088 mm |
| T | 18,034 mm |
| B | 18,288 mm |
| C | 13,97 mm |
| R | 2,3 mm |
| r | 1,3 mm |
| a - | 4,1 mm |
| Da | 62 mm |
| db | 46 mm |
| da | 42,5 mm |
| Db | 59 mm |
| Aa | 0,7 mm |
| Ab | 1,1 mm |
| Weight | 0,23 Kg |
| Basic static load rating (C0) | 60,3 kN |
| Factor (G1) | 20,4 |
| Factor (G2) | 15 |
| Factor (Cg) | 0,0159 |
| Factor (K) | 1,76 |
| Basic dynamic load rating | 11,7 |

Lm29749/Lm29710 Bearing 2D drawings and 3D CAD models



China abec 7 Bearing Supplier

| | |
|----------------------------------|----------------------|
| (C90) | |
| Basic dynamic load rating (Ca90) | 6,64 |
| Basic dynamic load rating (C1) | 45 kN |
| Calculation factor (e) | 0,33 |
| bore diameter: | 1.5000 in |
| cage material: | Steel |
| cup width: | 0.5500 in |
| operating temperature range: | -65 to +250 ° F |
| assembly type: | Cone & Cup |
| dynamic load capacity: | 10900 lbf, 19000 lbf |
| outside diameter: | 2.5625 in |
| static load capacity: | 13600 lbf |
| cone width: | 0.7200 in |
| finish/coating: | Uncoated |
| closure type: | Open |
| series: | LM29700 |
| bearing material: | Chrome Steel |
| flange type: | Non-Flanged Cup |